


Example 2.4 Earth and pore water pressures on basement wall

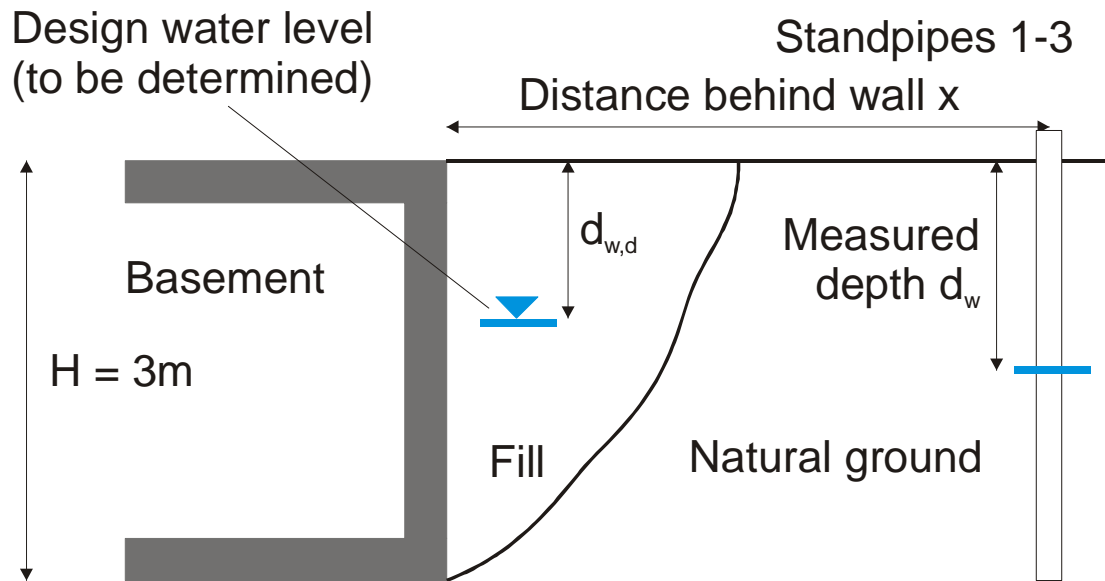

This example is designed to compare engineers' assumptions about water pressures acting on the face of a basement wall. The wall will NOT be provided with a drainage system. Ground surface behind the wall is horizontal will be paved in the long term.

Please assume that the natural water level behind the wall is at:
 $d_w = 1.5\text{ m}$

Three situations are envisaged (with different materials involved):

Situation A: natural ground = clay, fill = clay fill (from excavated natural ground)
 Natural clay: $\gamma_k = 22\text{ kN/m}^3$, $c_{u,k} = 35\text{ kPa}$, $\phi'_k = 25^\circ$, $c'_k = 0\text{ kPa}$

Situation B: natural ground = clay, fill = imported granular fill
 Natural clay: as above
 Imported granular fill: $\gamma_k = 18\text{ kN/m}^3$, $\phi'_k = 35^\circ$, $c'_k = 0\text{ kPa}$

Situation C: natural ground = gravel, fill = imported granular fill
 Natural gravel: $\gamma_k = 19\text{ kN/m}^3$, $\phi'_k = 40^\circ$, $c'_k = 0\text{ kPa}$
 Imported granular fill: as above

For each situation A-C above, please determine:

- 1) [omitted in Phase 2]
- 2) The characteristic thrust on the wall (over height H) owing to water pressures alone
- 3) The characteristic thrust on the wall (over height H) owing to effective earth pressures alone

Repeat 1-3 above using design values for the serviceability limit state (SLS)
 Finally, repeat 1-3 above using design values for the ultimate limit state (ULS)